


FX DRAG CONVEYOR

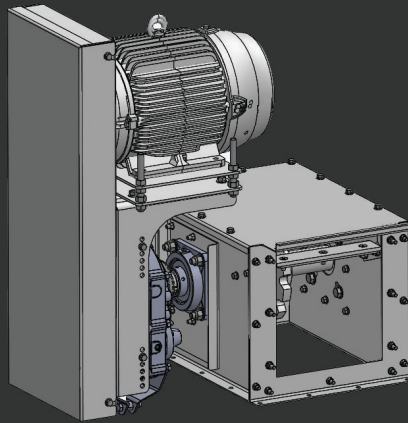

HEAD SECTIONS


- Available in standard Box Style Discharge
- Fully Bolted Assemblies
- Standard hardened tooth split sprockets
- Flange or Pillow Block Bearings depending on HP

DRIVES

- Standard class 2 Shaft Mount Reducer with belt drives
- OSHA Guard

STANDARD FINISH OPTIONS (on all components)

- Galvanized

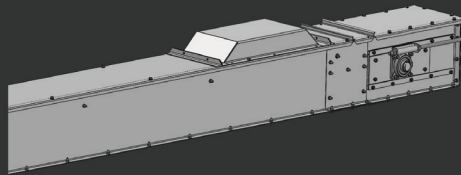

INLETS

- Standard raised inlet
- Bypass inlet
- Metered inlet

GATES



- Standard inline style intermediate or head end discharge
- Operator options: manual, hand or chain wheel
- Linear actuator
- Air Cylinder
- Worm gear motor with rack & pinion



Model	CAPACITY RANGE (BPH)	DENSITY (LBS/BUS)	(MT/HR)
FX810	36-2000	60	1-55
FX1210	2000-4000	60	55-109
FX1214	4000-7000	60	109-190
FX1614	7000-9000	60	190-245
FX1616	9000-11000	60	245-300

COVERS

- Bolted – environmental or weather tight covers throughout

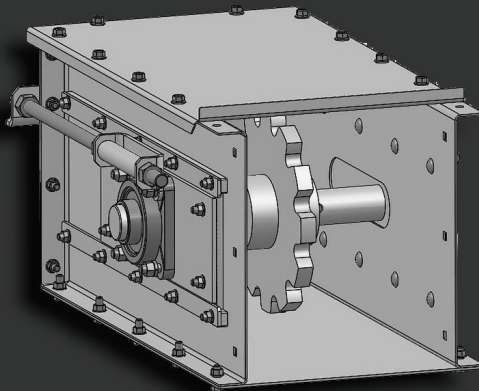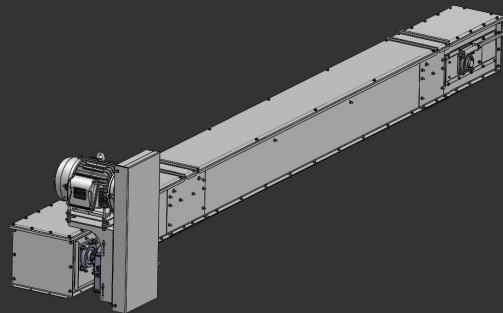

TAIL SECTIONS

- Bolted assembly
- Standard screw take up for chain tensioning
- Standard hardened tooth split sprockets
- Flange bearings

CHAIN

- Standard 81XH chain comes with HD welded flights and UHMW bolted paddles

TROUGH SECTIONS

- Bolted assembly
- Return rollers or return angle guides

